



**Work platforms and lifts
made in accordance with the customer's order
2017**


Aluminium Alloy Lift 1 (4)



Aluminium Alloy Lift 2 (4)



Aluminium Alloy Lift 3 (4)

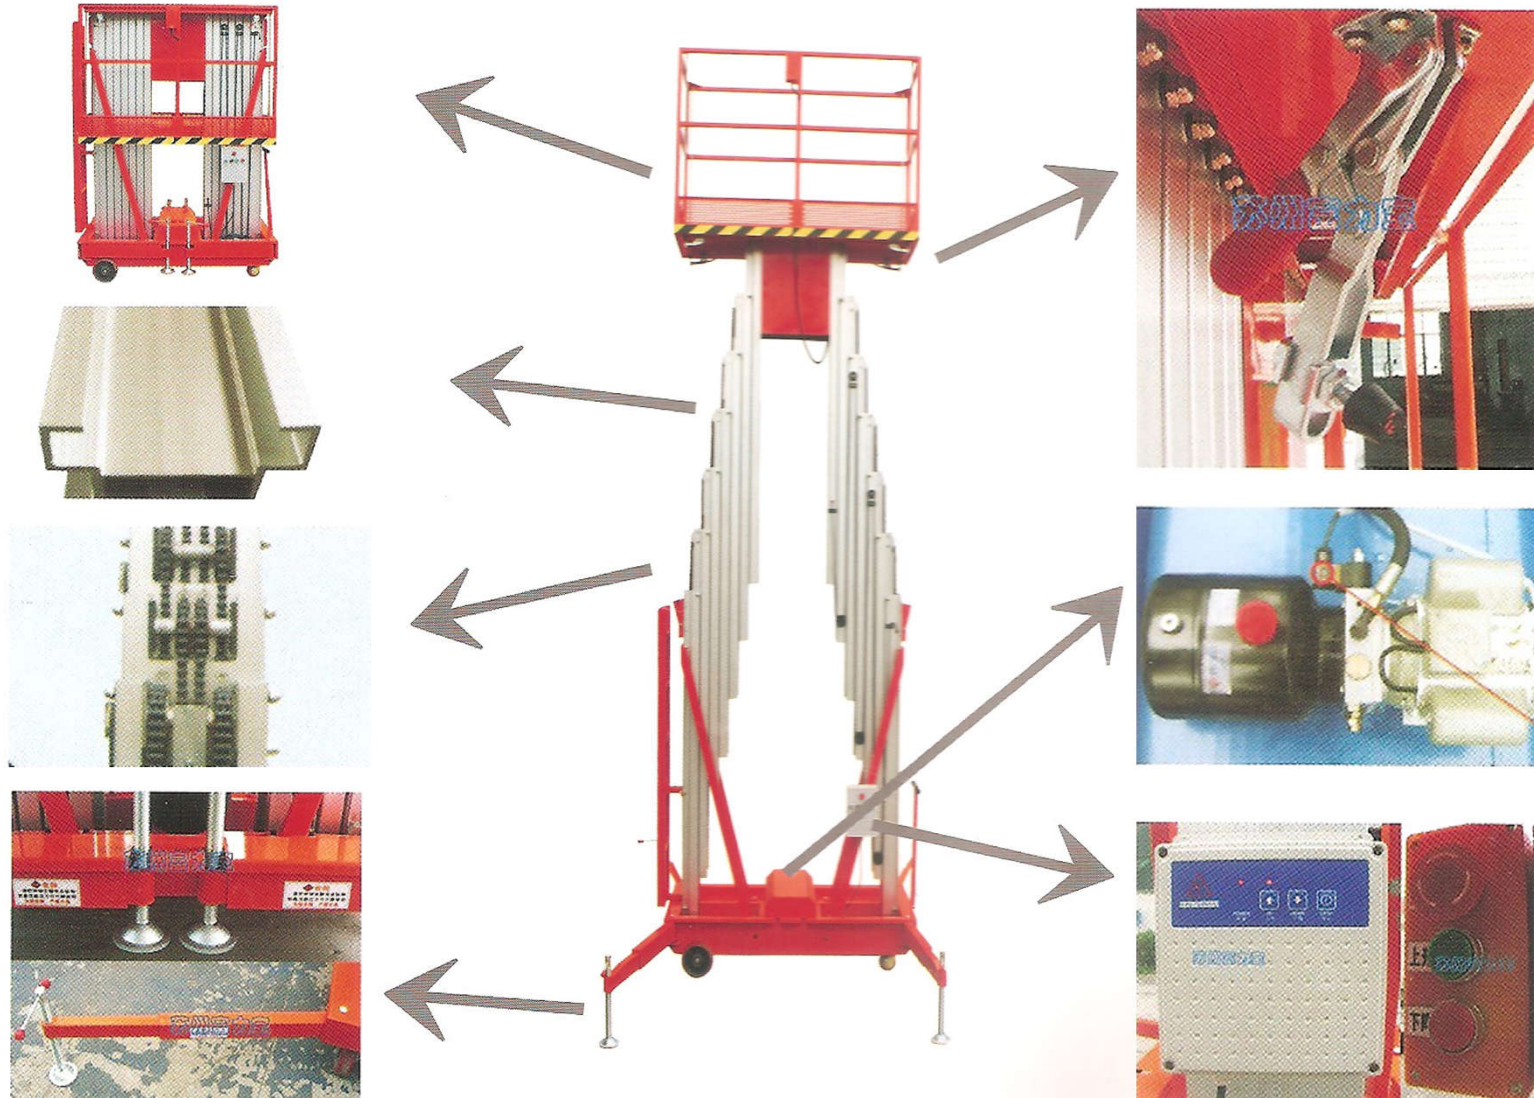

Aluminium Alloy Lift 4 (4)



Model	Max height of platform (m)	Maximum operating altitude platform (m)	Rated Load (kg)	Platform (m)	Power Voltage V/HZ	Motor power (KW)	Total weight (kg)	Dimensions (m)
GTWY4-100	4	5.7	125	0.64 x 0.58	AC220/50HZ	0.75	250	1.18 x 0.80 x 1.65
GTWY6-100	6	7.7	125	0.64 x 0.58	AC220/50HZ	0.75	280	1.28 x 0.80 x 1.65
GTWY8-100	8	9.7	125	0.64 x 0.58	AC220/50HZ	0.75	300	1.28 x 0.80 x 1.98
GTWY9-100	9	10.7	125	0.64 x 0.58	AC220/50HZ	0.75	320	1.36 x 0.85 x 1.98
GTWY6-200S	6	7.7	200	1.16 x 0.60	AC220/50HZ	1.1	450	1.36 x 0.85 x 1.65
GTWY8-200S	8	9.7	200	1.32 x 0.60	AC220/50HZ	1.1	550	1.36 x 0.85 x 1.98
GTWY9-200S	9	10.7	200	1.32 x 0.60	AC220/50HZ	1.1	600	1.56 x 0.90 x 1.98
GTWY10-200S	10	11.7	200	1.32 x 0.60	AC220/50HZ	1.1	650	1.56 x 0.90 x 2.04
GTWY11-200S	11	12.7	200	1.32 x 0.60	AC220/50HZ	1.1	680	1.56 x 0.90 x 2.04
GTWY12-200S	12	13.7	200	1.42 x 0.60	AC220/50HZ	1.1	700	1.66 x 0.97 x 1.98
GTWY13-250S	13	14.7	200	1.56 x 0.80	AC220/50HZ	2.2	1000	1.69 x 1.13 x 2.28
GTWY14-200S	14	15.7	200	1.56 x 0.82	AC220/50HZ	2.2	1100	1.69 x 1.13 x 2.48
GTWY16-200S	16	17.7	200	1.60 x 0.82	AC220/50HZ	2.2	1400	1.80 x 1.15 x 2.48
GTWY18-150S	18	19.7	150	1.48 x 0.80	AC220/50HZ	2.2/1.1	1600	2.26 x 1.30 x 2.45

Set of Cylinder Lift 1 (2)



Model	Max height of platform (m)	Rated Load (kg)	Platform (m)	Power Voltage V/HZ	Motor power (KW)	Rising Speed (m/s)	Dimensions (m)	Total weight (kg)
GTTY-6A	6	200	0.75 x 0.75	AC220/50HZ	1.1	0.054	1.02 x 0.92 x 1.80	480
GTTY-8A	8	200	0.8 x 0.8	AC220/50HZ	1.1	0.044	1.16 x 0.92 x 2.05	580
GTTY-10A	10	200	0.8 x 0.8	AC220/50HZ	1.1	0.04	1.16 x 1.00 x 2.17	650
GTTY-12A	12	200	0.8 x 0.8	AC220/50HZ	1.1	0.03	1.40 x 1.23 x 2.23	900
GTTY-14A	14	200	0.8 x 0.8	AC220/50HZ	1.1	0.028	1.40 x 1.23 x 2.23	1075
GTTY-15A	15	200	0.8 x 0.8	AC220/50HZ	1.1	0.026	1.40 x 1.23 x 2.23	1200

Set of Cylinder Lift 2 (2)



Model	Max height of platform (m)	Rated Load (kg)	Platform (m)	Power Voltage V/Hz	Motor power (KW)	Rising Speed (m/s)	Dimensions (m)	Total weight (kg)
GTTY-16B	16	200	0.8 x 0.8	AC220/50HZ	1.5	0.026	1.68 x 1.39 x 2.30	1350
GTTY-18B	18	200	0.8 x 0.8	AC220/50HZ	1.5	0.026	1.72 x 1.39 x 2.60	1430
GTTY-20B	20	150	0.8 x 0.8	AC220/50HZ	1.5	0.042	1.72 x 1.39 x 2.70	1650
GTTY-21B	21	150	0.8 x 0.8	AC220/50HZ	1.5	0.040	1.72 x 1.39 x 2.80	1700
GTTY-22B	22	150	0.8 x 0.8	AC220/50HZ	1.5	0.035	1.97 x 1.65 x 2.80	1850
GTTY-23B	23	150	0.8 x 0.8	AC220/50HZ	1.5	0.030	1.97 x 1.65 x 2.90	2000
GTTY-24B	24	150	0.8 x 0.8	AC220/50HZ	1.5	0.043	1.97 x 1.65 x 3.00	2200
GTTY-25B	25	150	0.8 x 0.8	AC220/50HZ	1.1 x 2	0.042	2.05 x 1.75 x 3.10	2350
GTTY-26B	26	150	0.8 x 0.8	AC220/50HZ	1.1 x 2	0.040	2.05 x 1.75 x 3.20	2450
GTTY-28B	28	120	0.8 x 0.8	AC220/50HZ	1.1 x 2	0.034	2.20 x 1.80 x 3.05	2500
GTTY-30B	30	120	0.85 x 0.85	AC220/50HZ	1.1 x 2	0.034	2.25 x 1.90 x 3.20	2800

Shear Fork Aerial Work Platform 1 (3)



Shear Fork Aerial Work Platform 2 (3)



- AC 380V (standard configuration)
- AC 22V (optional, 11 meters below the machine)
- DC power supply (optional)
- Explosion – proof mining choice (DIIBT4) of Suitable for a variety of explosion – proof occasions demand Petrochemical, paint, dust, ect.
- Manual power (optional)
- Manual / power dual-use (optional)
- Platform epitaxy (optional)



Shear Fork Aerial Work Platform 3 (3)



Model	Max height (mm)	Lift time (s)	Rated Load (kg)	Platform (mm)	Power Voltage V/HZ	Motor power (KW)	Total weight (kg)	M x H (mm)
SJY0.3-3	3000	16	300	1300 x 850	380V/50HZ	1.5	400	1000
SJY0.48-3	3000	16	480	1300 x 850	380V/50HZ	1.5	420	1000
SJY0.3-4.5	4500	31	300	1300 x 850	380V/50HZ	1.5	450	1100
SJY0.48-4.5	4500	31	480	1300 x 850	380V/50HZ	1.5	470	1100
SJY0.3-6	6000	54	300	1800 x 900	380V/50HZ	1.5	700	1100
SJY0.48-6	6000	49	480	1800 x 900	380V/50HZ	1.5	740	1100
SJY0.3-7.5	7500	62	300	1800 x 1000	380V/50HZ	2.2	800	1200
SJY0.48-7.5	7500	62	480	1800 x 1000	380V/50HZ	2.2	850	1200
SJY0.3-9	9000	72	300	1800 x 1000	380V/50HZ	2.2	950	1350
SJY0.48-9	9000	81	480	1800 x 1000	380V/50HZ	2.2	1000	1580
SJY0.3-11	11000	73	300	2100 x 1150	380V/50HZ	3	1200	1600
SJY0.48-11	11000	80	480	2100 x 1150	380V/50HZ	3	1350	1600
SJY0.3-12	12000	85	300	2450 x 1350	380V/50HZ	3	1500	1720
SJY0.48-12	12000	90	480	2450 x 1350	380V/50HZ	3	1600	1720
SJY0.3-14	14000	98	300	2450 x 1350	380V/50HZ	4	2200	1900
SJY0.48-16	12000	130	480	2500 x 1500	380V/50HZ	5.5	2600	1950
SJY1-6	6000	50	1000	1800 x 1100	380V/50HZ	3	1200	1300
SJY1-9	9000	90	1000	2450 x 1350	380V/50HZ	4	2200	1800
SJY1-11	11000	90	1000	2400 x 1500	380V/50HZ	4	2400	1800
SJY0.48-7.5	7500	90	1000	2450 x 1350	380V/50HZ	4	2600	1800

Self-Propelled Aerial Work Platform 1 (2)



- Drive wheel walk no manual towing
- Large capacity battery as power source, to ensure long time work
- The governor plate system adopt U.S. import, to ensure that the workplace is infallible
- Design the battery blackout emergency lowering system, to ensure security of the job staff

Self-Propellered Aerial Work Platform 2 (2)



Model	Rated Load (kg)	Max height (mm)	Platform (mm)	Lift time (s)	Power Voltage V/HZ	Motor power (KW)	Drive speed	Total weight (kg)
SJZ0.3-6	300	6000	1850 x 880	54	DC-24V	2.2	0-6.5	1220
SJZ0.48-6	480	6000	1850 x 880	49	DC-24V	1.5	0-6.5	1250
SJZ0.3-7.5	300	7500	1800 x 1000	62	DC-24V	2.2	0-6.5	1300
SJZ0.48-7.5	480	7500	1800 x 1000	65	DC-24V	2.2	0-6.5	1350
SJZ0.3-9	300	9000	1850 x 1000	78	DC-24V	3	0-6.5	1400
SJZ0.48-9	480	9000	1800 x 1000	82	DC-24V	3	0-6.5	1460
SJZ0.3-11	300	11000	2100 x 1150	88	DC-24V	3	0-6.5	1500
SJZ0.48-11	480	11000	2100 x 1150	92	DC-24V	3	0-6.5	1550
SJZ0.3-12	300	12000	2450 x 1350	98	DC-48V	3	0-5	1950
SJZ0.48-12	480	12000	2450 x 1350	102	DC-48V	3	0-5	2100
SJZ0.3-14	300	14000	2450 x 1350	110	DC-48V	4	0-5	2600
SJZ0.48-14	480	14000	2450 x 1350	118	DC-48V	4	0-5	2680
SJZ0.3-16	300	16000	2750 x 1500	130	DC-48V	4	0-5	3400
SJZ1-9	1000	9000	2000 x 1000	90	DC-48V	3	0-5	2100
SJZ1-11	1000	11000	2200 x 1200	110	DC-48V	4	0-5	2400



Vehicular Aerial Work Platform





Vehicular aerial work platform is lifting platform and storage battery or car modified Aerial work platform equipment. Lifting platform using dc or engine power drive vehicle Lifting platform. Walking function of the vehicle, make the lifting platform has better flexibility and machine of movement, make the aerial work more efficient, able to adapt to wide area, large liquidity Aerial work.



Stationary hydraulic lifting platform 1 (5)

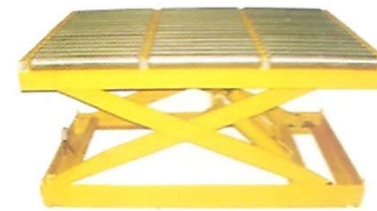

Stationary hydraulic lifting platform 2 (5)

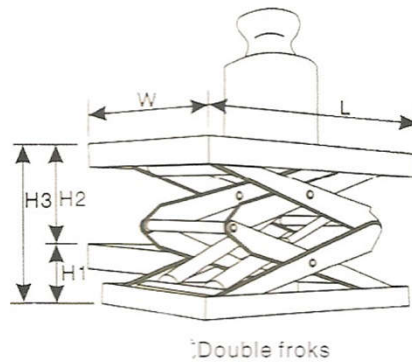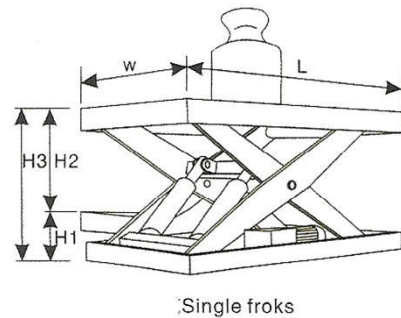

Type	Model	Capacity	H1	Drive speed	H3	L x W	Rise time	Motor power	Total weight
Single Fork	SJG0.9-0.5	0.9	180	500	680	1220 x 700	15	0.75	400
	SJG0.9-0.85	0.9	180	850	1030	1220 x 700	16	0.85	400
	SJG1-0.97	1	230	970	1200	1500 x 700	19	1.5	450
	SJG1.5-1.2	1.5	230	1200	1430	1680 x 1000	31	1.5	600
	SJG2-0.9	2	220	900	1120	1300 x 1000	31	1.5	500
	SJG2.65-0.85	2.65	230	850	1080	1400 x 1000	32	1.5	520
	SJG2.65-1.2	2.65	230	1200	1430	1680 x 1000	39	3	650
	SJG4.5-1.2	4.5	340	1200	1540	2000 x 1000	56	5.5	1500
	SJG8-0.5	8	480	500	980	2800 x 2000	20	5.5	2500
	SJG40-0.5	40	830	500	1330	3500 x 1800	17	22	5500
	SJG2-1.2	2	230	1200	1430	2000 x 1500	26	3	1200
	SJG2.24-1.5	2.24	230	1500	1730	2440 x 1800	41	3	1400
	SJG2.5-2	2.5	410	2000	2410	3200 x 2500	56	3	2300
	SJG3-1.2	3	240	1200	1440	1800 x 1800	40	3	1100
	SJG3-1.7	3	450	1700	2150	3800 x 1800	55	2.2	2400
	SJG4.5-1.5	4.5	410	1500	1910	2500 x 1500	50	3	1600
	SJG7-1.5	7	410	1500	1910	2600 x 1500	48	5.5	2410
	SJG10-1.6	10	600	1600	2200	3500 x 2200	50	5.5	3700
SJG12-1.8	12	650	1800	2450	4000 x 2200	90	5.5	5200	
Dual Fork	SJG0.5-2.8	0.5	460	2800	3260	2200 x 1000	25	1.5	600
	SJG0.8-1.2	0.8	300	1200	1500	1200 x 1000	16	1.1	420
	SJG1-1.7	1	350	1700	2060	1500 x 1000	28	1.5	600
	SJG1.5-1.2	1.5	340	1200	1540	1500 x 1000	23	3	650
	SJG1.5-2.4	1.5	500	2400	2900	2000 x 1500	25	3	900
	SJG2-1.6	2	400	1600	2000	1500 x 1200	41	1.5	860
	SJG2.5-2	2.5	620	2000	2620	2200 x 1200	40	3	1300
	SJG3-1.2	3	420	1200	1620	1600 x 1600	30	3	1100
	SJG4-2.3	4	660	2300	2960	2200 x 1000	53	5.5	1500
	SJG5-1.5	5	480	1500	1960	1700 x 1000	50	4	1450


Stationary hydraulic lifting platform 3 (5)




Stationary hydraulic lifting platform 4 (5)




Optional configuration




Optional for release warm occasions Use of explosion-proof electrical




Optional make lifting platform is more stable The guide rail and wheel




Optional easy to maintain the external Hydraulic power unit

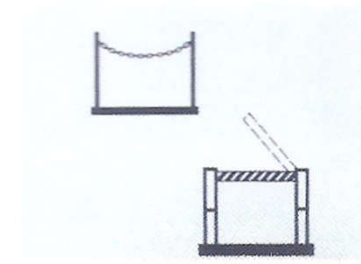


Can be equipped with chains, lever, sliding doors Such as open the door forms




根据需求，可配多点控制
Based on demand and can be equipped with multi-point control



Optional jog on demand Or self-protection button operation



Optional lifting platform running warning light Or the warning bell

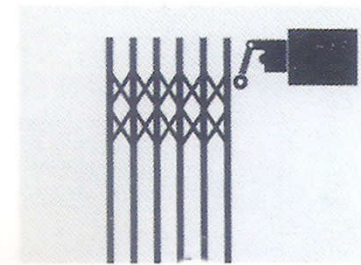

Can configure the outside door open when locked Lifts the safety switch.

Stationary hydraulic lifting platform 5 (5)



Thank you for your time!
Questions?



May we prepare an offer for you ?

Ain Adamson
Chairman

Okeanos LC OÜ

Võru 15A, 50111 Tartu, Estonia

Tel: +372 5120470

ain.adamson@okeanos.ee